
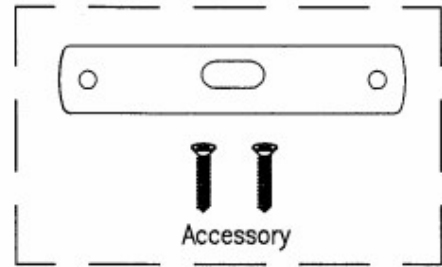
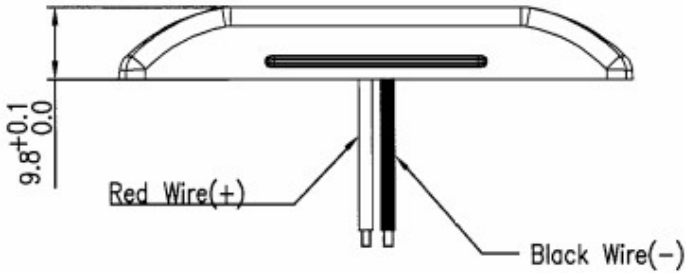
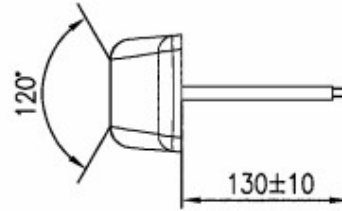
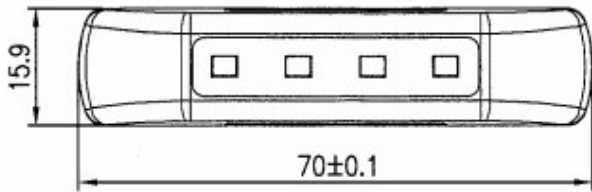
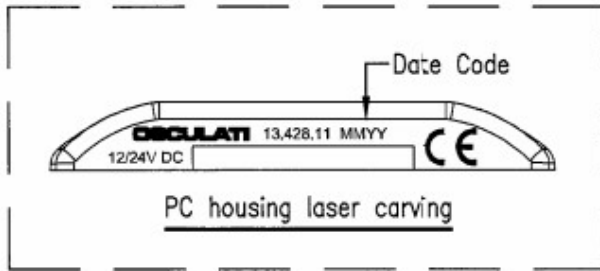


Rating	12~24V DC 0.5W-0.05A/12V 1.2W-0.05A/24V	Mounting Hole For $\phi 3 \times 16$ mm Screw 	Material Cover : SUS304 Lens : Clear PC Cable : UL1430 ,22AWG , Black/Red130mm Gasket : EVA, Black
Insulation Resistance	-20°C ~ +60°C		
Operation Temperature	DC 500V 100M ohm Min.		
LED Type	Warm White LED(3000K)*4		
LED Lifespan	50,000 hours		
Max Illuminance	53lux±20%		
Illuminance Flux	47.6lm±20%		
Type Approval	IP67 · CE(EN55015, EN61547)		

LED Veiwng Angle



* $\phi 3 \times 16$ mm Screw x 2 pcs
*Black Gasket x1 pcs



Osculati pack
(double blister/card/barcode)

