




indelB



ABOUT VANLIFE
& OUTDOOR SPIRIT



Plein-Aircon



D.C. 12 Volt Air Conditioning




up to 6 meters vehicles






OFF

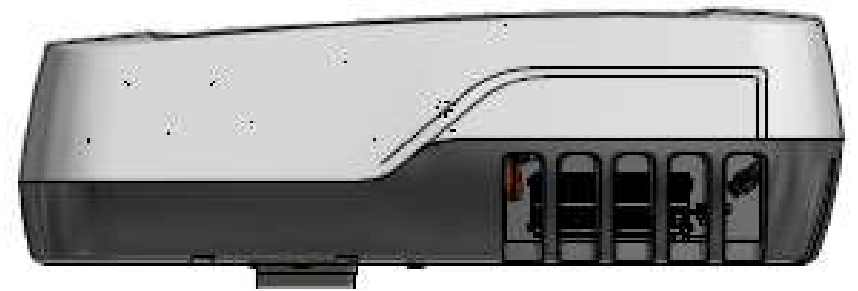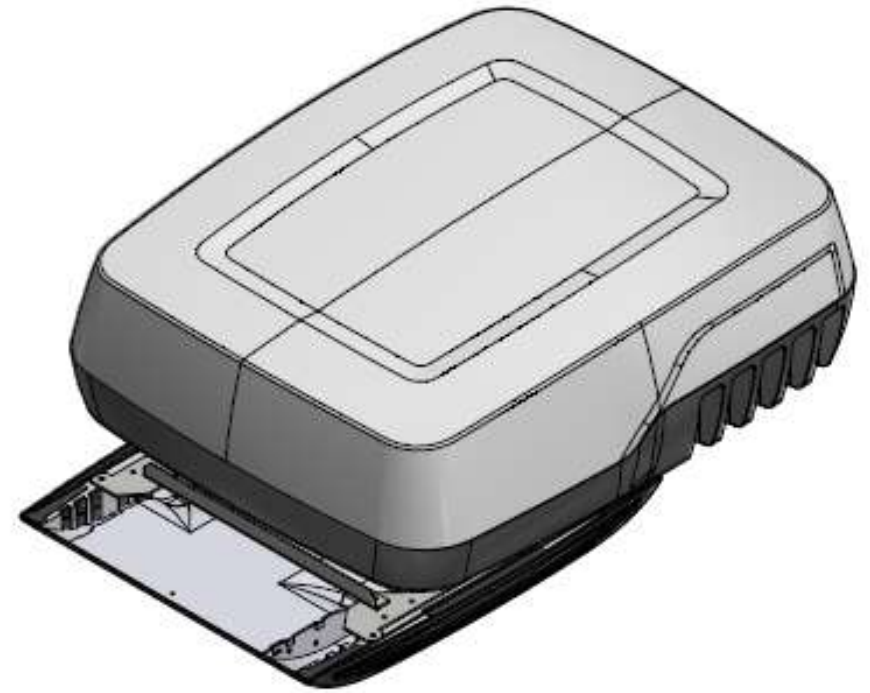

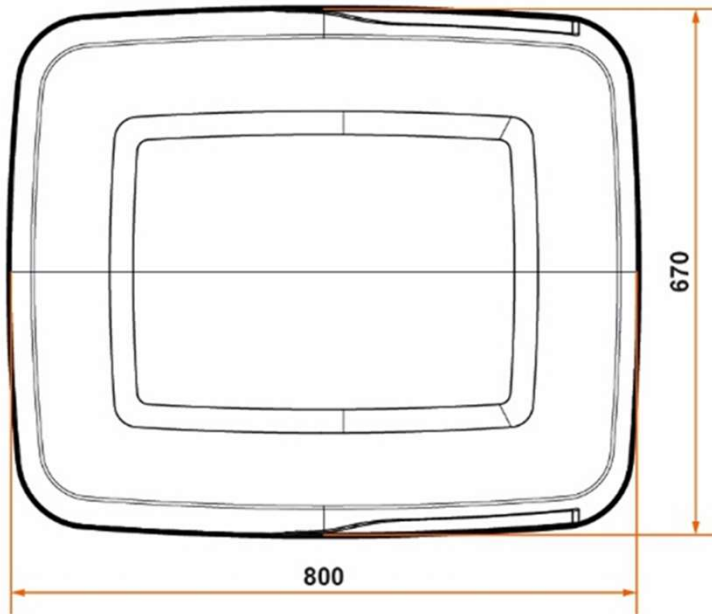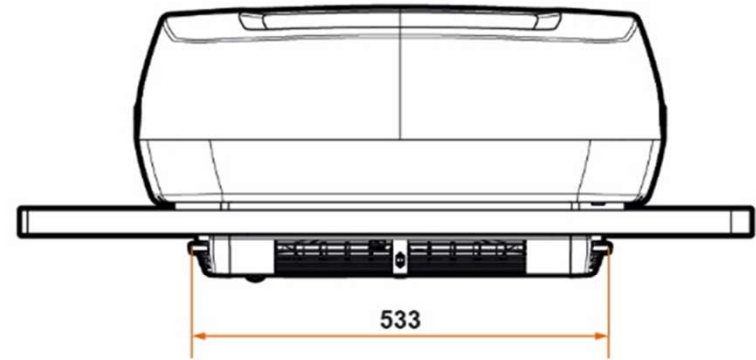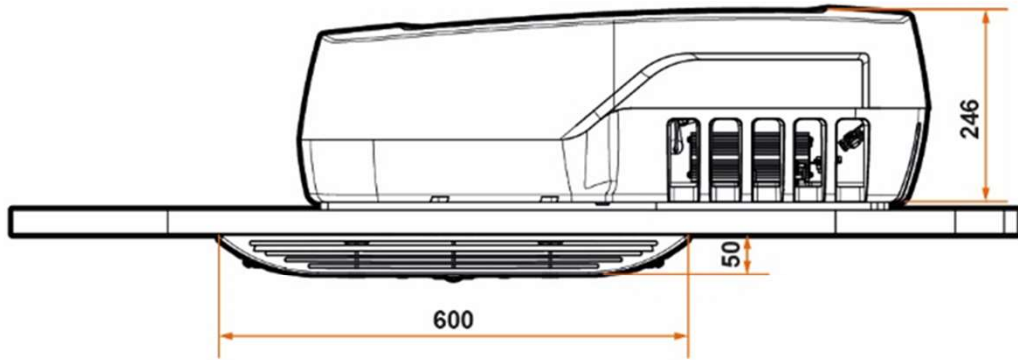

OFF

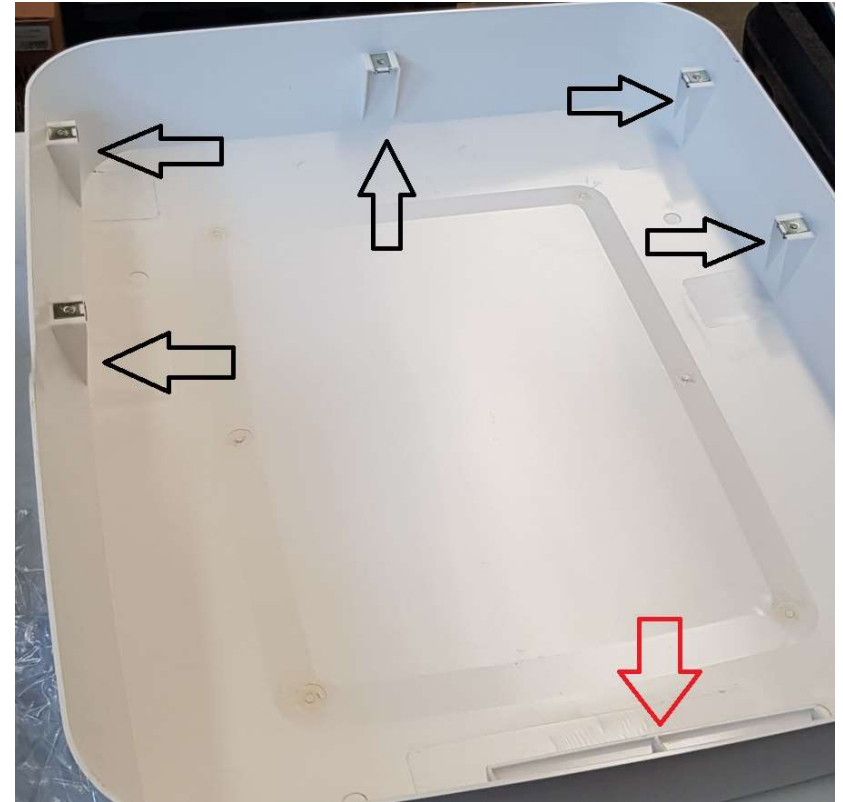

For maintenance, the **EXTERNAL INJECTION COVER** (without any visible screws) is quickly removable from outside

Technical Data

Input Voltage	12V DC (optional 220V adapter)
Ventilation Air Flow	350 m3/h
Refrigerant	R134a
External Unit Weight	23,1 Kg
Internal Air Diffuser Weight	2,1 Kg
Fixing Kit Weight	1,7 Kg
Cooling Capacity at 32°C ambient temperature (internal and external) - Turbo Mode	1200 Watt
Power Consumption at 32°C ambient temperature (internal and external) -Standard Mode	16,0 A
Power Consumption at 32°C ambient temperature (internal and external) -Turbo Mode	42,0 A
Dehumidification Mode at 32°C ambient temperature (internal and external) - Standard Mode	14,0 A
Ventilation Mode	1,5A (min) - 5,0 (max)




Samsung
Direct
Current
Compressor

SAMSUNG


OFF

indelB


INSIDE THE BOX




A




B




C




D



E



F




M




AA




BB



G



H



I




CC




DD




EE



J



K






L



FF







GG

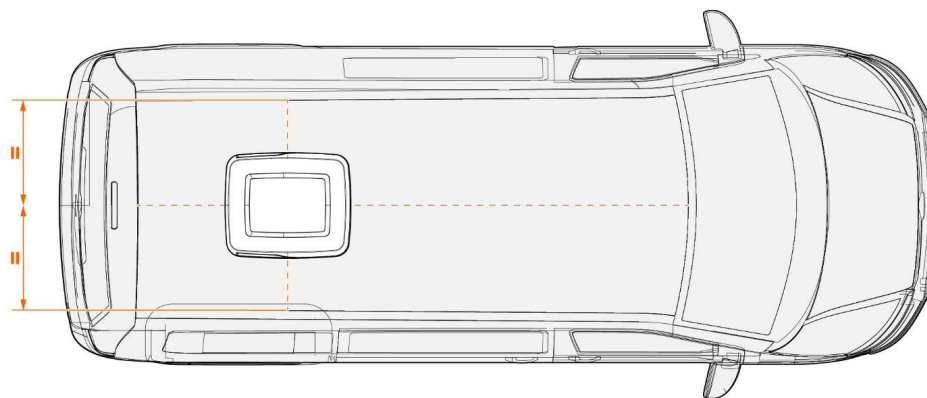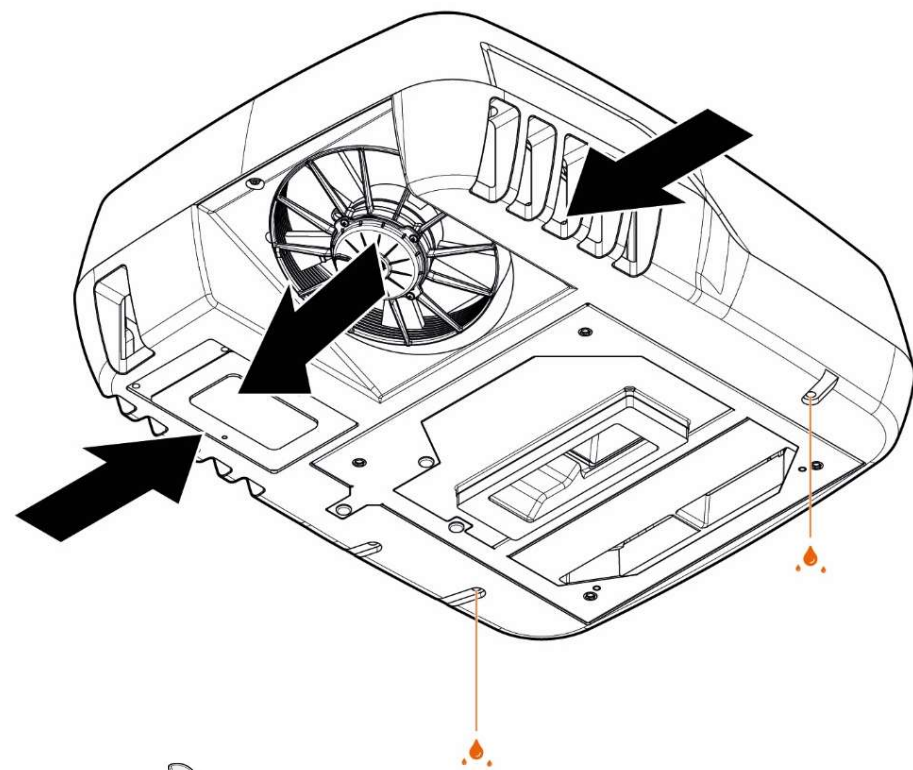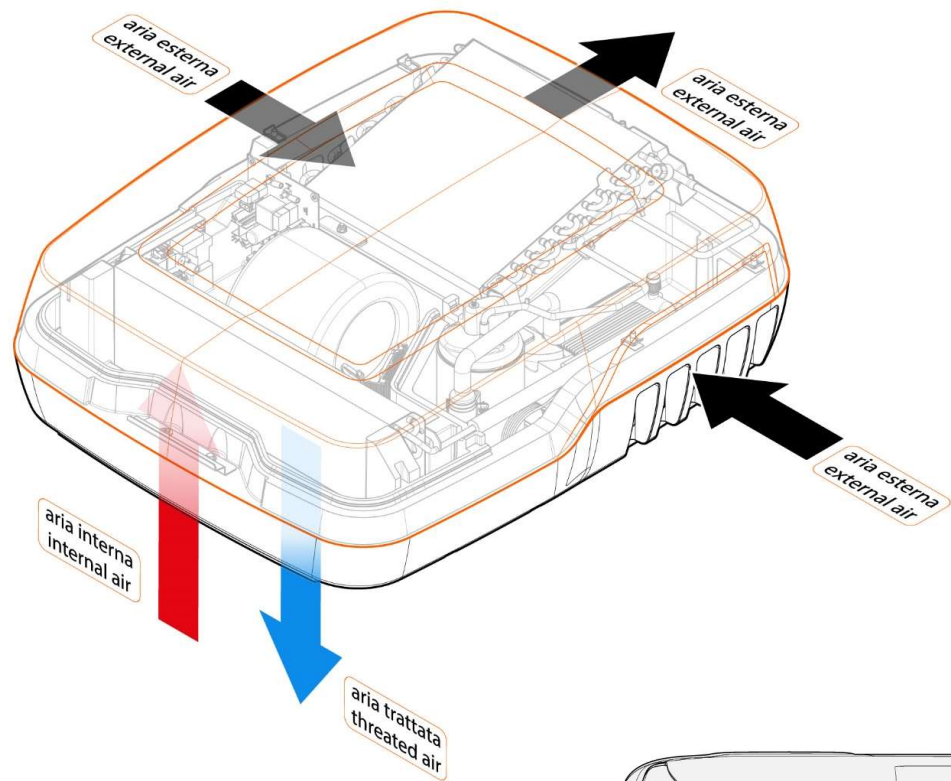


OFF



indelB

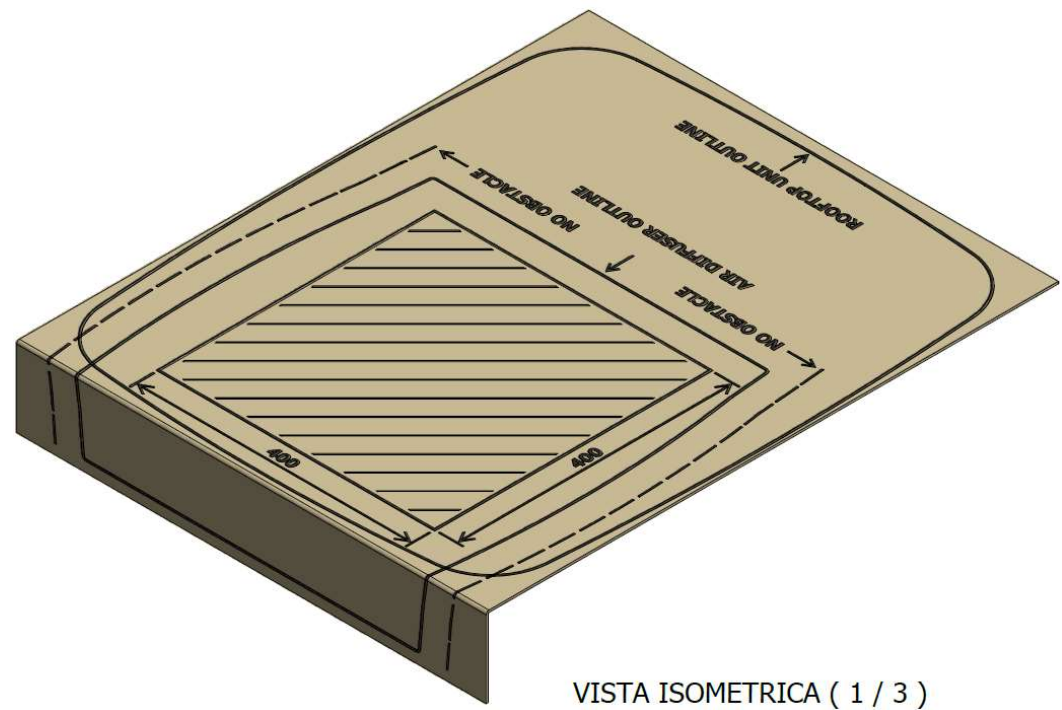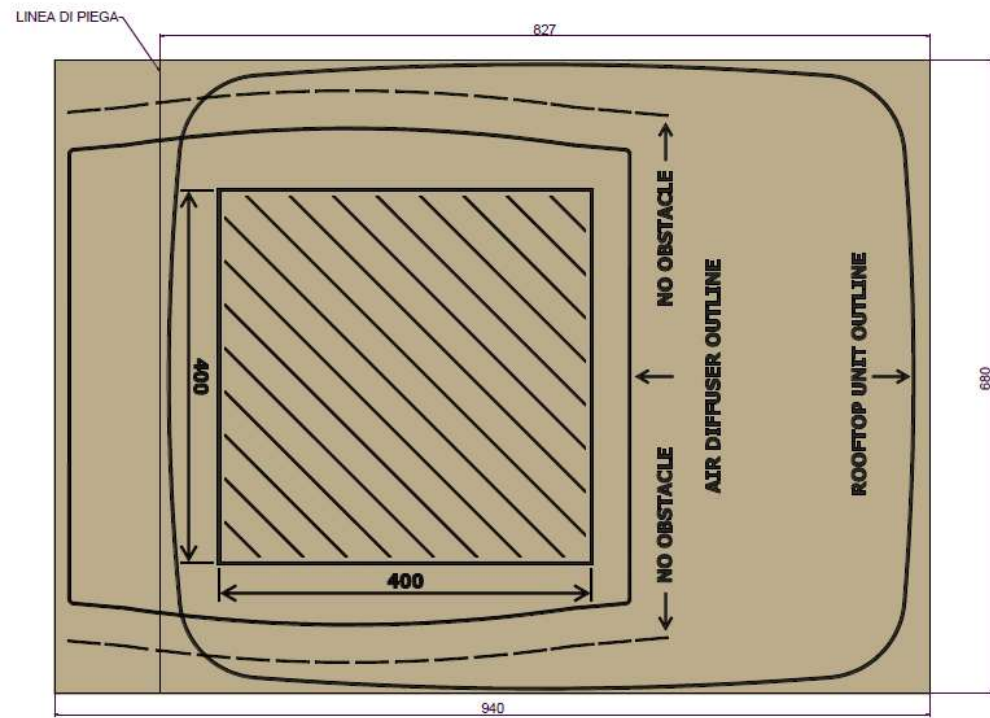

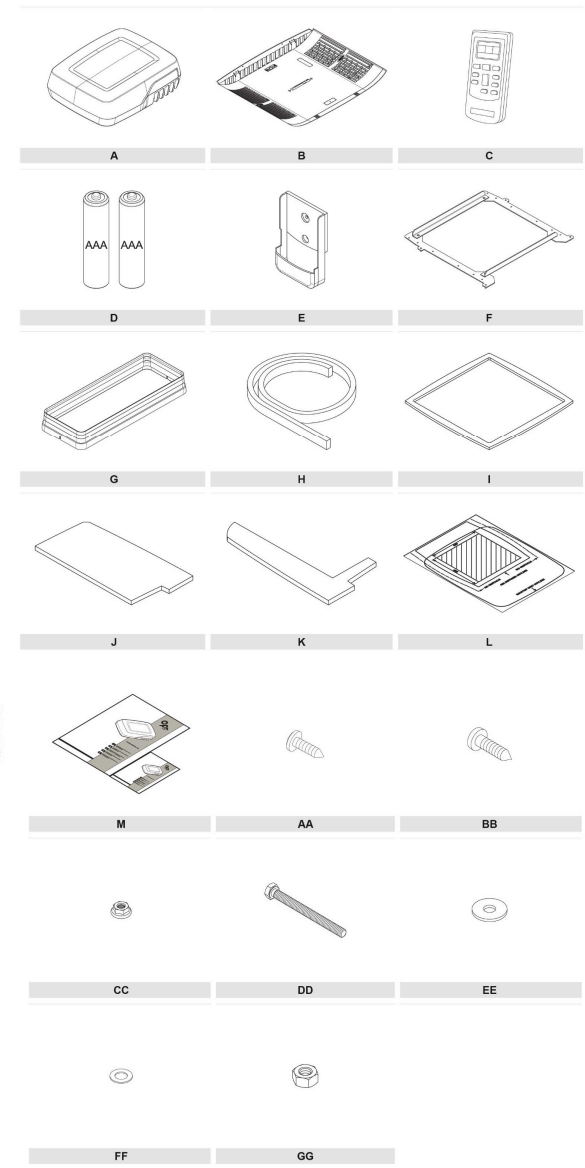
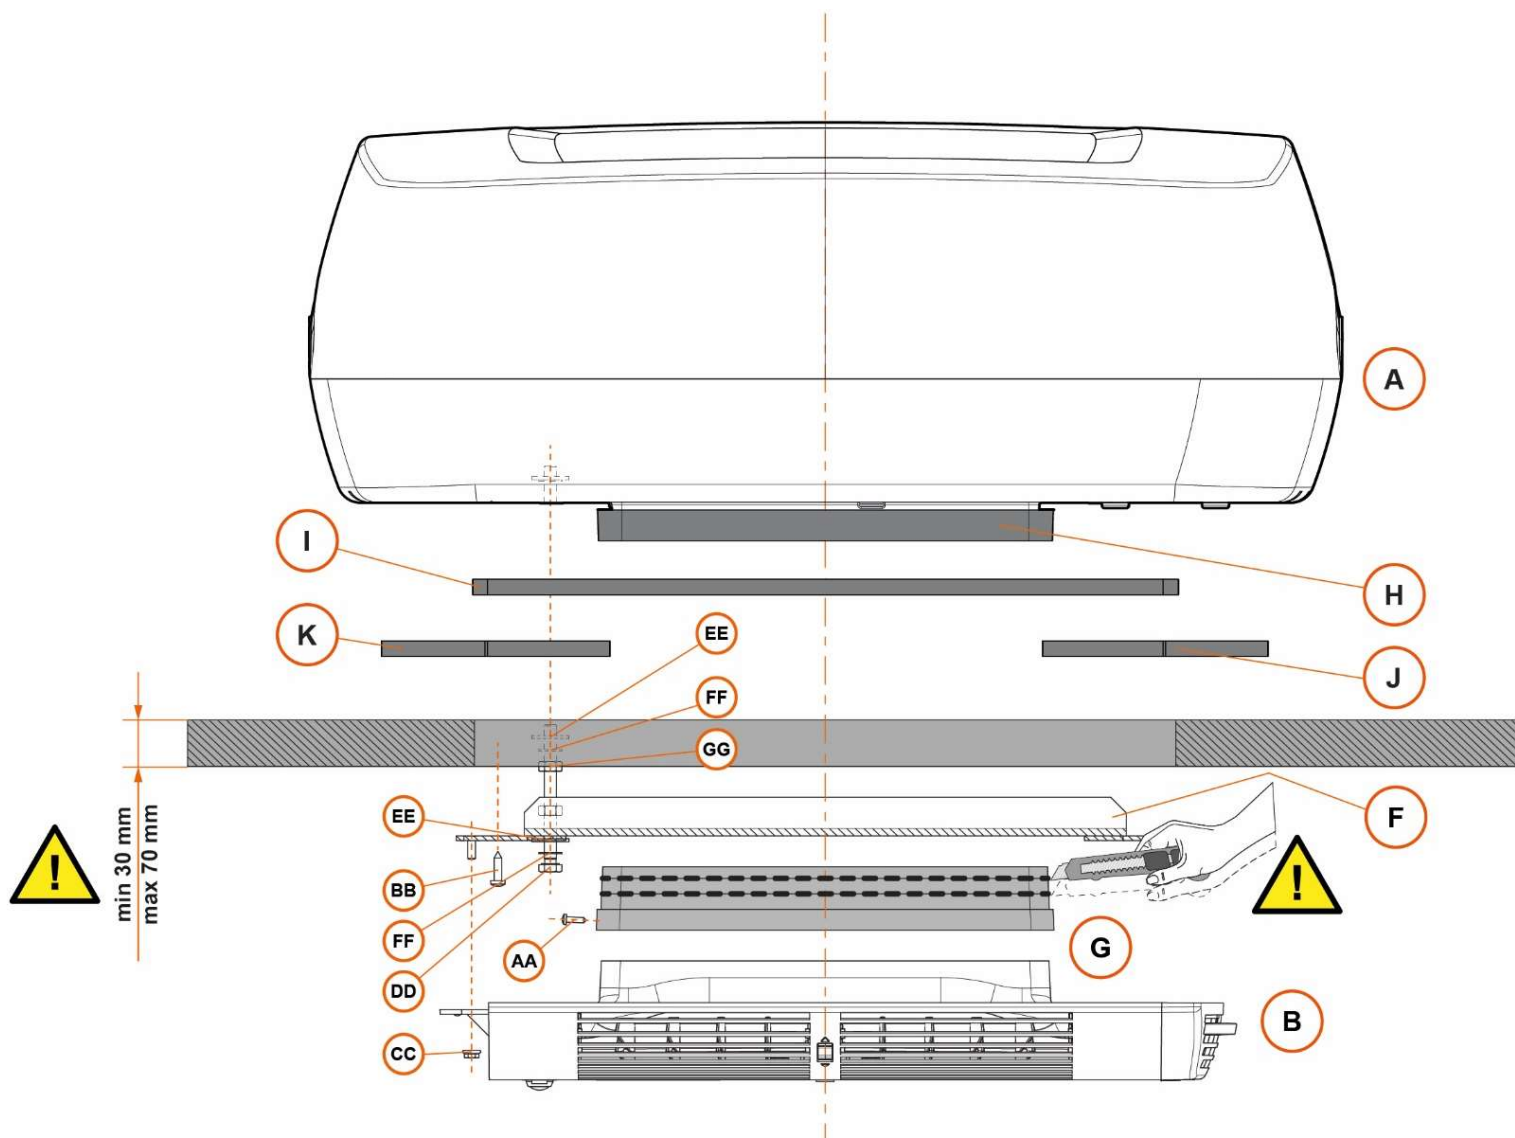


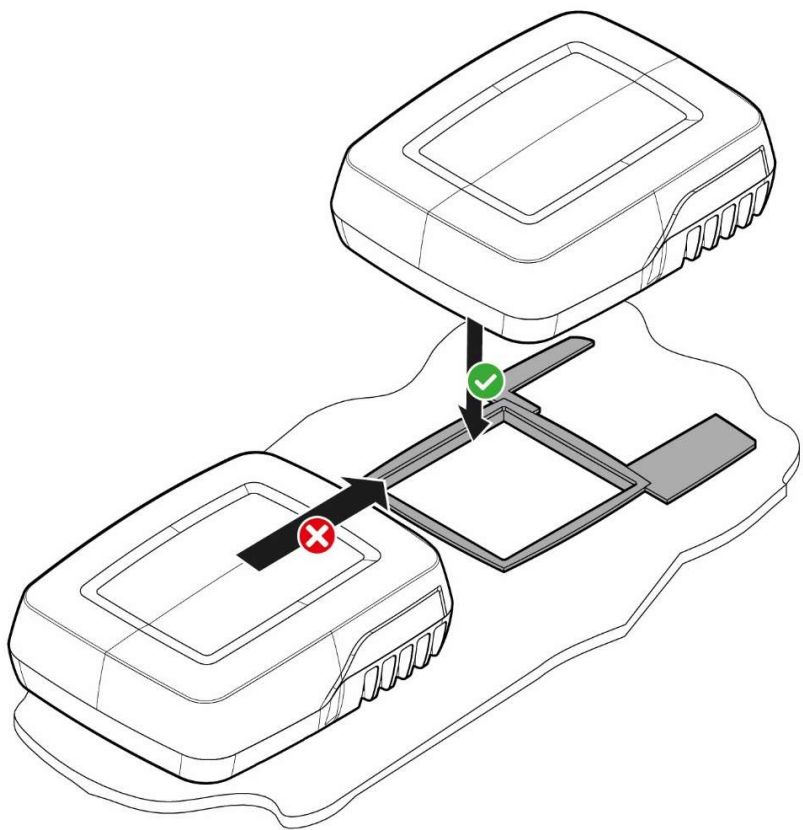

OFF

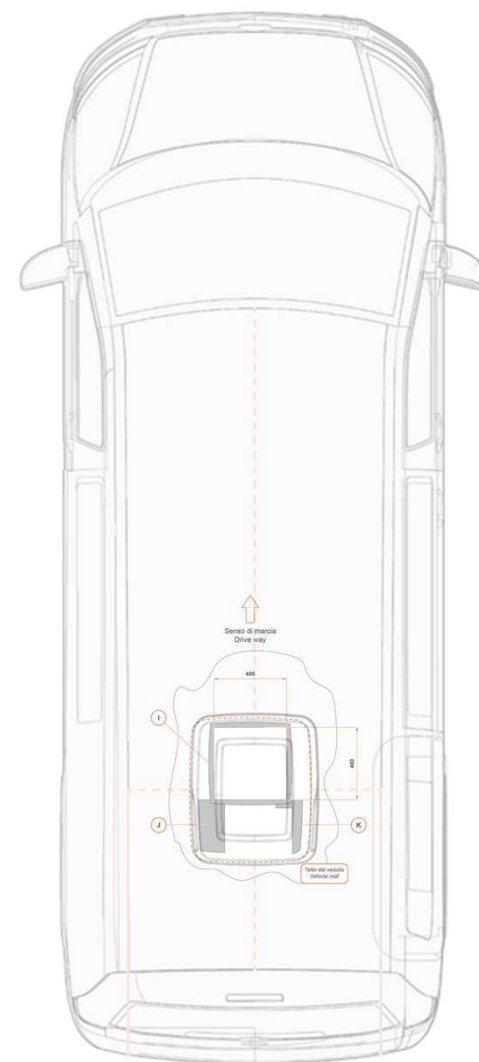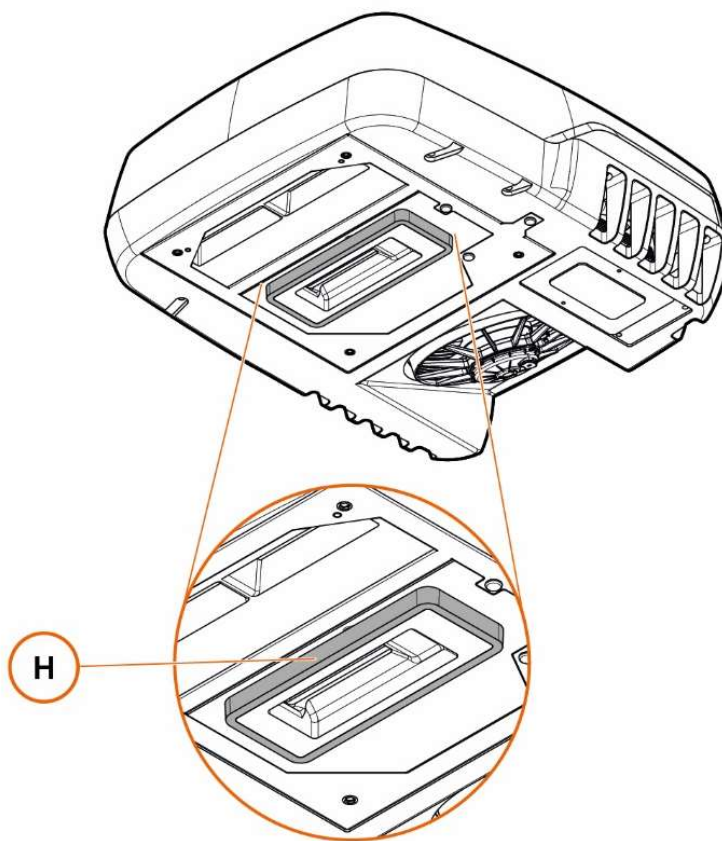


indelB

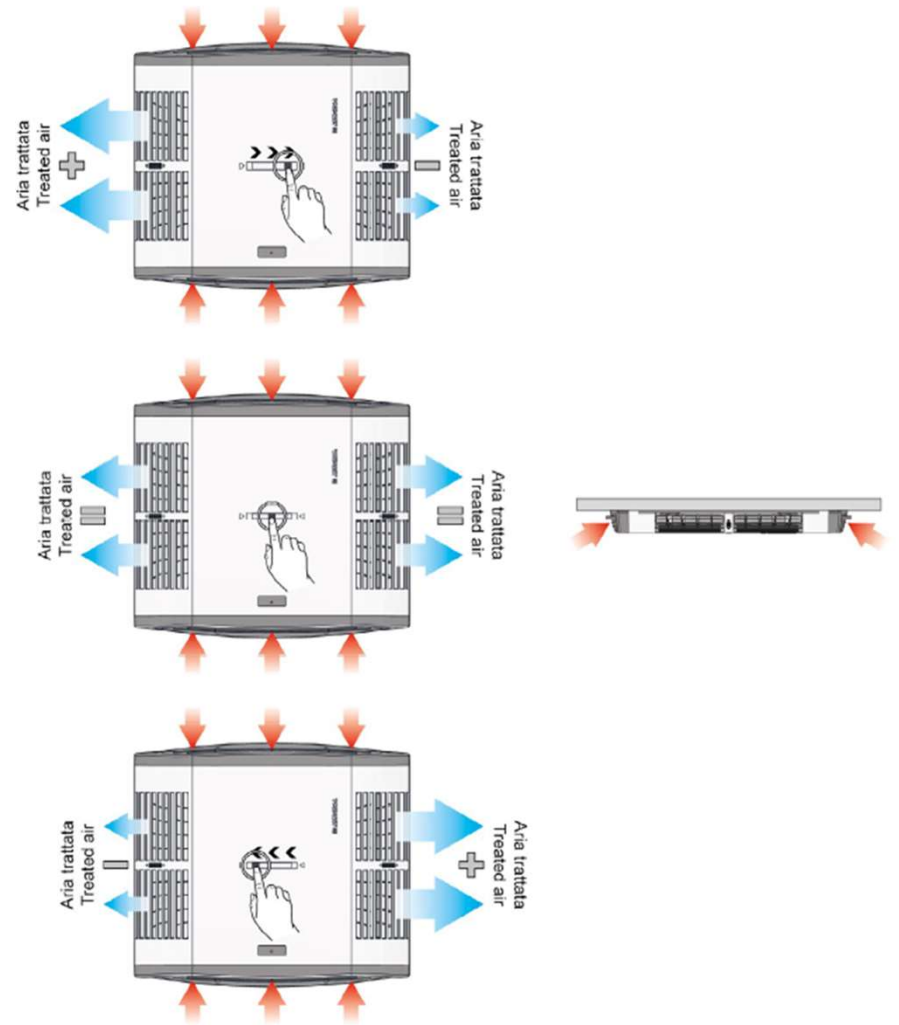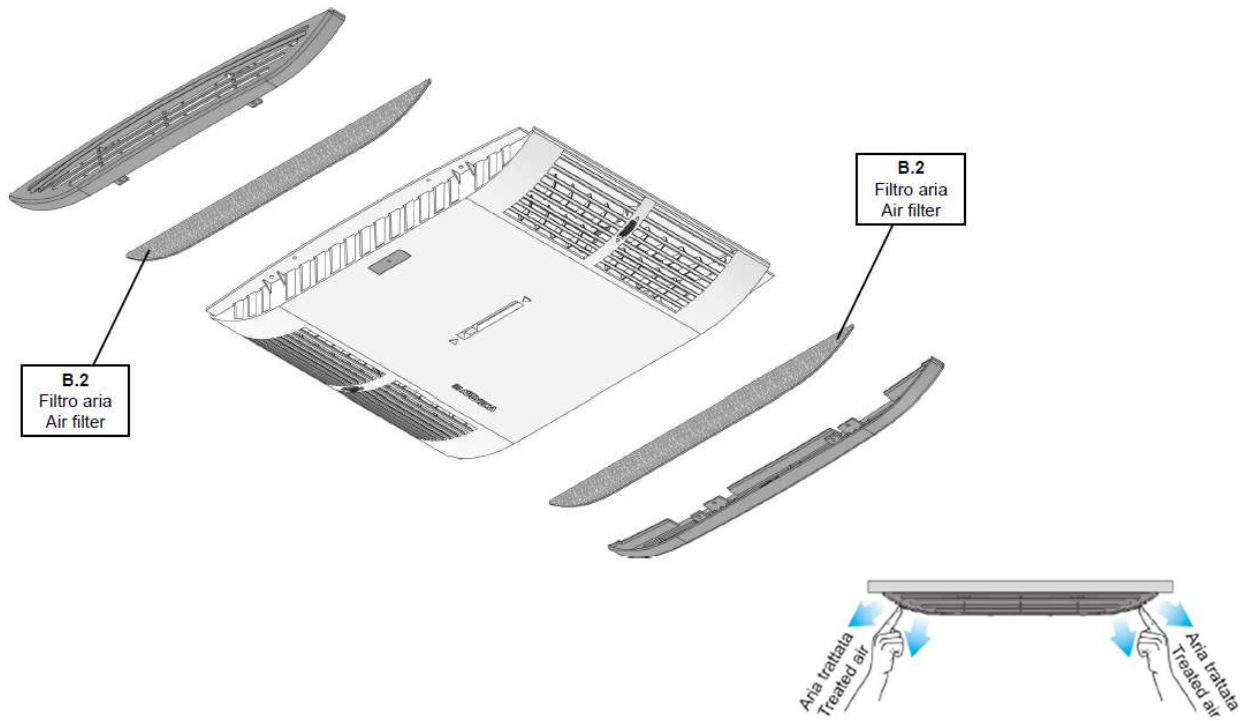






OFF

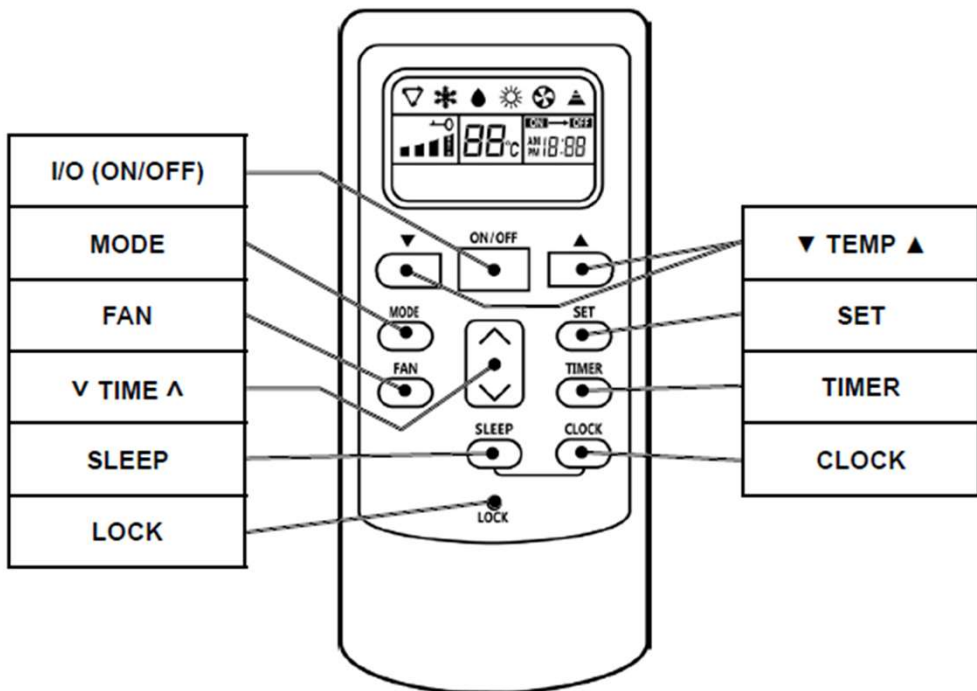

REMOTE CONTROL	
KEY FUNCTIONS	DESCRIPTION
I/O (ON/OFF)	Switches the conditioning unit on / off.
MODE	Enables sequential selection between the three operating modes: conditioning ✱, dehumidification ◆, ventilation ☼.
FAN	Enables sequential selection between fan speeds: auto , high , medium , low . In dehumidification mode ◆ (when switching on), the fan is always on minimum speed.
▼ TEMP ▲	Enable the choice of the required temperature between 15 °C and 30 °C.
TIMER	Enables the choice in sequence: ON←OFF (scheduled switch on); ON→OFF (scheduled switch off); (no programming). When a setting is programmed, the ^ v key enables the choice of the time required from 1h to 16h.
v TIME ^	Enables alteration of the time in the dedicated functions.
CLOCK	Enables adjustment of the clock. Press CLOCK; then press SET to select the digits to alter, press the ^ v key to change the hour or minutes selected.
SLEEP	Switches off the system 8 hours after activation and, during this period of time, the temperature gradually increases by 2°C from the pre-set temperature. It operates in the following modes: conditioning ✱.
LOCK	Press the key with a pointed object to block ←0 / release the keyboard.

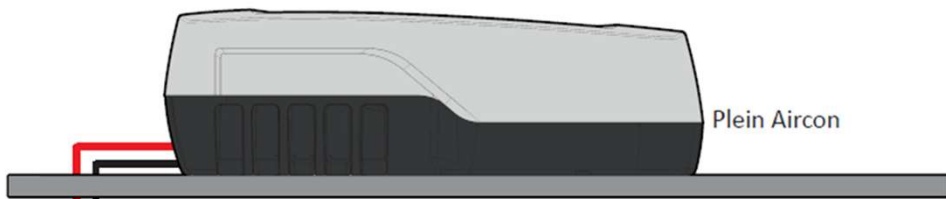

SMART SWITCH TRANSFORMER optional

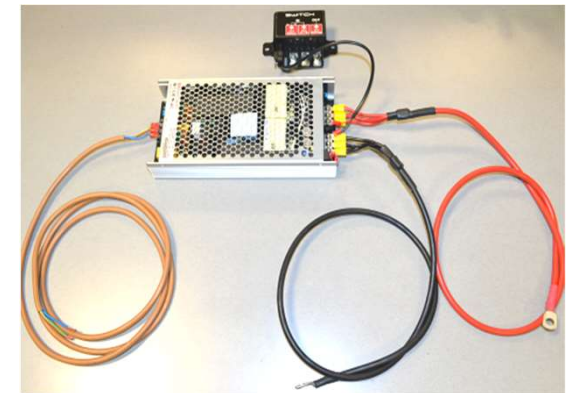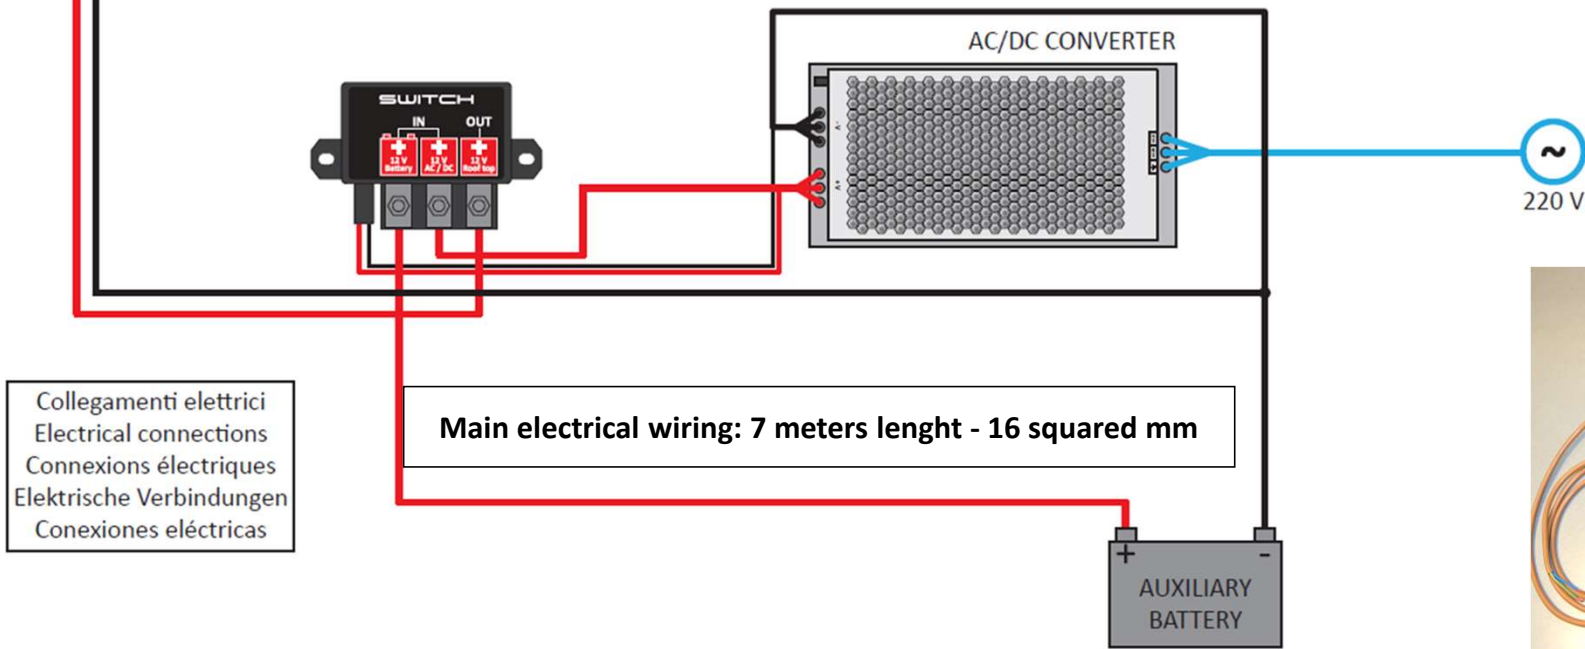

Plein-Aircon 12V




Roof air conditioner system /
Aria condizionata da tetto

ITEM / PRODOTTO	PURCHASING CODE	BAR CODE	PRICE
Plein-Aircon 12V NEW 2020 Roof air conditioner system / Aria condizionata da tetto	SW012T08	8056040792926	€ 1.790,00

Accessories / Accessori

ITEM / PRODOTTO	PURCHASING CODE	BAR CODE	PRICE
220V Smart switch transformer	Z999/1250	8056040793022	€ 390,00







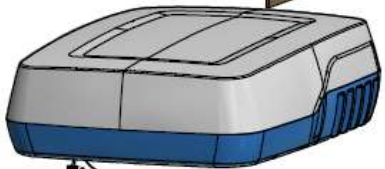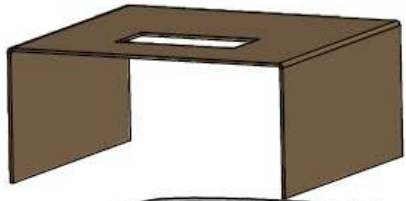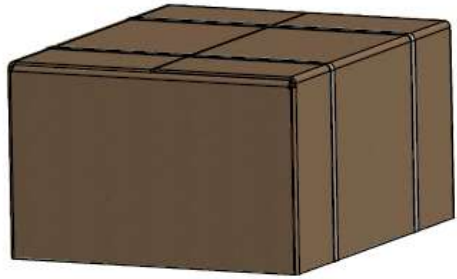

12V PLEIN-AIRCON

ONE CODE, ONE PRICE, ALL INCLUDED


you don't need to buy additional installation kits, wiring, frames: everything is inside the original box

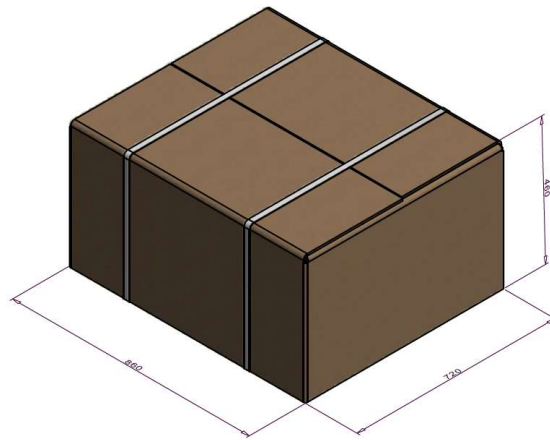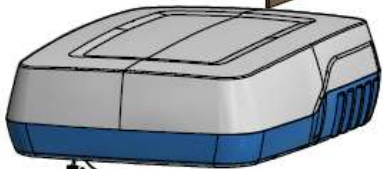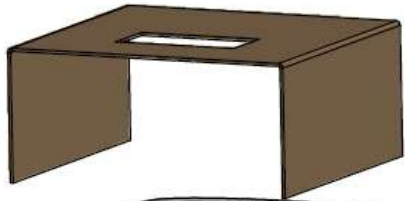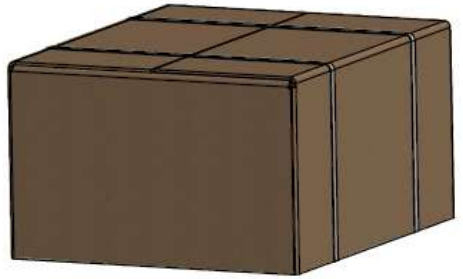

LOADING PARAMETERS

Pallet: 1059mm H x 1450mm W x 860mm D
Quantity x pallet: 4 pieces

Possible 8 pcs Max H 220

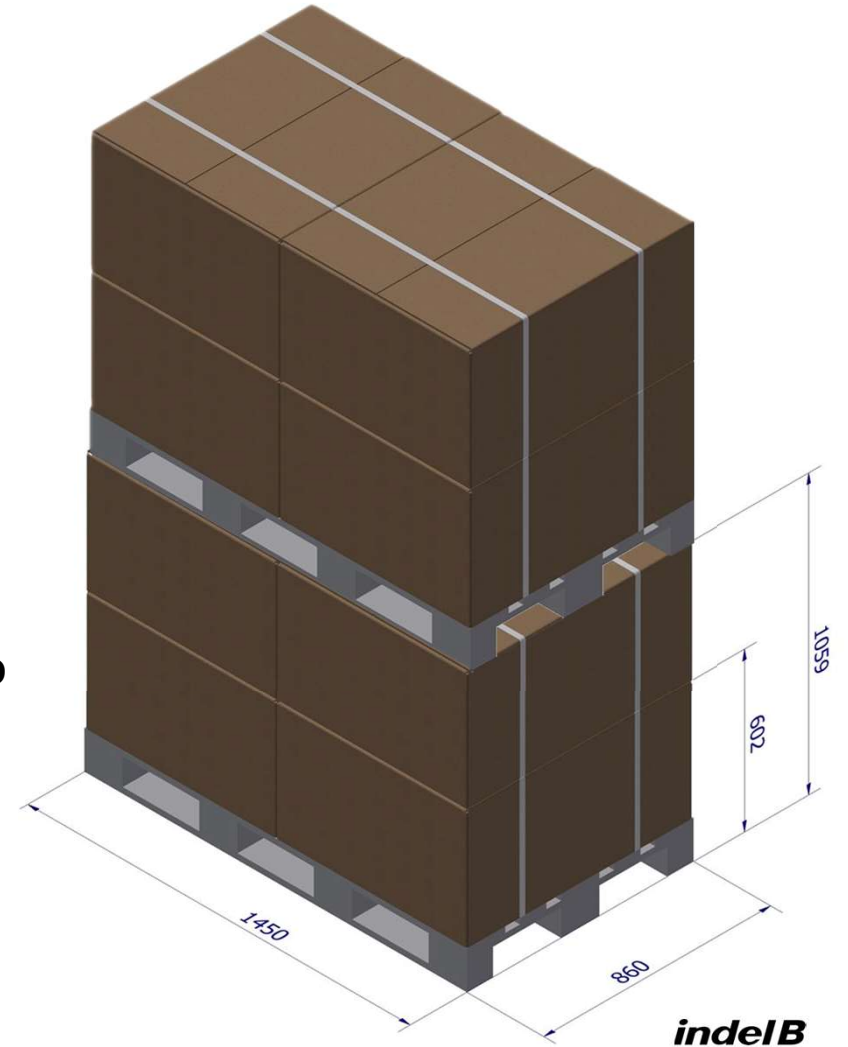

**THANK
YOU!**

