


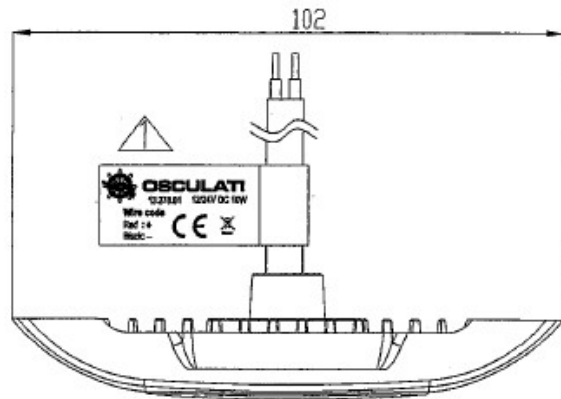
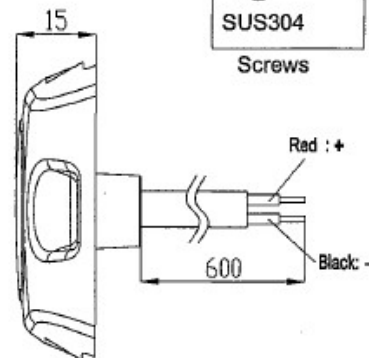



Rating	12V/24V DC 12V/0.75A 24V/0.38A MAX 10W±20%
LED Type	5W White LED *3PCS
Insulation Resistance	DC 500V 100M ohm Min
Operation Temperature	-30°~+80°
Waterproof Function	IPX8
CCT	5700K
Max Illuminance	2000Lux±20%/50Cm.
Luminous Flux	998LM±20%
Beam Angle	30°±20%

Mounting Hole	Material
82.6±1	1.Lens:PC 2.Base:Aluminum alloy
2-φ3.5 φ15	

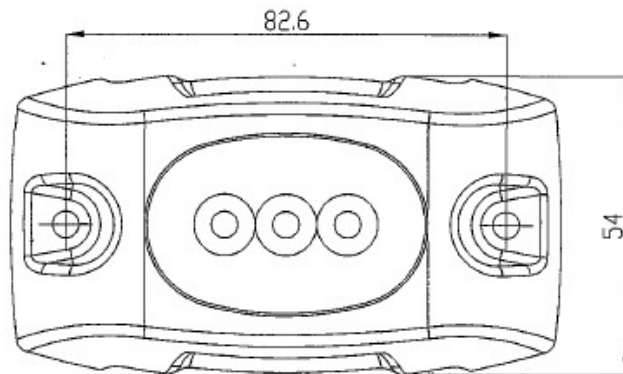

LABEL 2:1

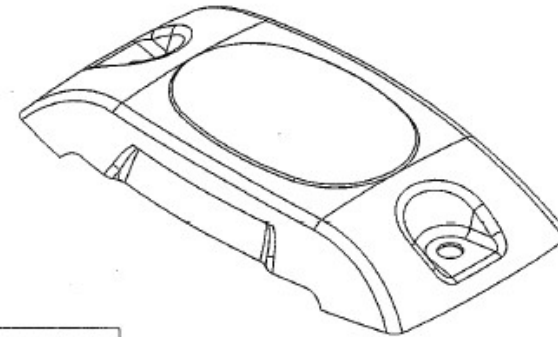

NOTE:

Heat causes, lights should be installed a minimum of 10 inches below the waterline

Osculati pack (Printed box / Barcode)