




14.385.20

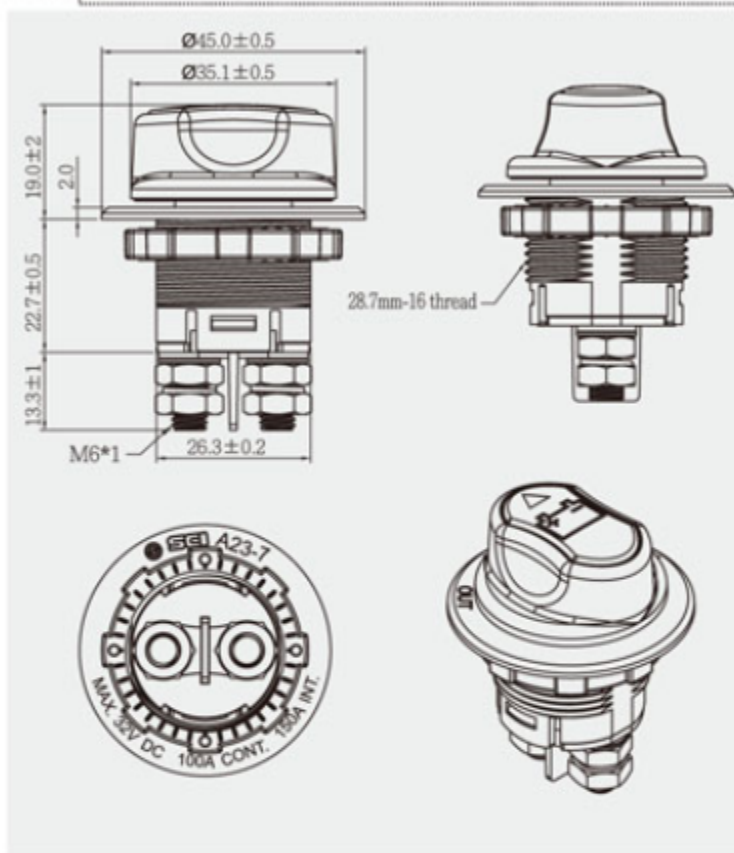

**A** Actuator can't be take out.




**B** Actuator can be take out.



Panel Thickness:11.0mm Max.

**B**



Panel Thickness:16.0mm Max.

IP40  
○ IP56

**Continuous Rating**

100 Amps 32VDC Max.

**Contact Resistance**

50M $\Omega$  Max

**Intermittent Rating**

150 Amps

**Cranking Rating**

500 Amps 5 sec.

**Insulation Resistance**

DC 500V 100M $\Omega$  Min

**Dielectric Strength**

AC 1000V 1 minute

DC 2000V 1 minute

**Operation Temperature**

-30 $^{\circ}$ C ~ +60 $^{\circ}$ C

**Switch Function**

2P SPST OFF-ON

## FEATURES

- Material:

Housing: Black, PA#66+33%GF, with white hot stamping

Actuator: Red, PBT+15%GF

Name Plate: White, ABS with black hot stamping

Bottom: Black, PBT+15%GF

Nut: Black, PA#66

Hex Nut: Ni-plated, Brass