

ROBUST LED SPOTLIGHT

OPERATION

HIGH > OFF
 [Press 3 seconds for LOW, further long press 2 seconds for 2Hz FLASHING]
 [Switch the safety lock downwards to prevent unwanted ON/OFF activation]

BULB TYPE

1 x XP-G2 Cree White LED

BATTERY TYPE

3 x 1.5V C Alkaline Batteries
 [Not Included]

ACCESSORIES

Carrying Strap & Shoulder Strap

SIZE


Ø75 mm x 146 mm x 160 mm

WEIGHT

524g [With Batteries]

ANSI FL 1	HIGH	LOW	2Hz FLASHING*
	250 LUMENS	35 LUMENS	NA
	24000cd	3200cd	NA
	300m	110m	NA
	33h	100h	180h
	✓		
IP67	✓		

* Flashing mode specifications cannot be measured by ANSI FL1 standard. Flashing mode runtime is based on measurement of battery capacity change only.

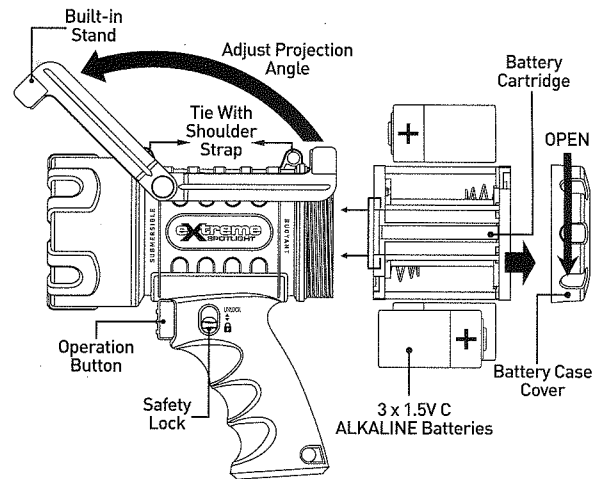

BATTERY REPLACEMENT

1. Open battery case cover and remove it from the unit
2. Remove battery cartridge.
3. Remove old batteries and replace with three new 1.5V C alkaline batteries according to the polarity labels.
4. Glide back the battery cartridge into the unit on its own track (don't force).
5. Replace battery case cover back on.

BULB REPLACEMENT

LED never needs to be replaced.


3x
 [Not Included]



▪ Rescue Missions



▪ Searching



▪ Campsite



▪ Workshop



▪ Repair Spot