


Pry to open the cover from the base using a flat screwdriver

LIFETIME FOR LUMEN MAINTENANCE

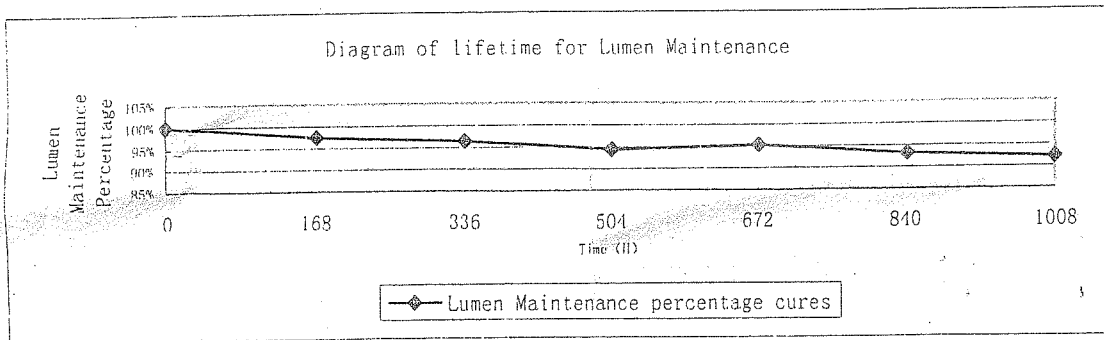

Testing Module: Lasting 1000 hrs, Temperature Range 36-40°C, Humidity: 60%RH, Input Voltage: DC12V

00767-WH & 00767-BU & 00767-WHO & 00767-BUO & 00767-WHOY	
Material	Housing: Made of SUS304
Housing Colour	polished S.S
LED Colour	<input checked="" type="checkbox"/> Daylight White <input type="checkbox"/> Warm White <input type="checkbox"/> Red <input type="checkbox"/> Yellow <input checked="" type="checkbox"/> Blue
LED	6pcs
LED Beam Angle	120°
Colour Temperature	<input type="checkbox"/> Warm White: K <input checked="" type="checkbox"/> Daylight White: 5500-6300 K
Features	Surface mount
Working Voltage	DC12V
Wattage	1.2 W
Effective Lumen	WH: 83Lumen BU: 22Lumen
water-proofing and dust-proofing	IP: 67
Life TEST FOR LED LAMP(1000 hours)	Lumen Maintenance Percentage > 90%
Operation Temperature	-20° ~ +45°C
Certificate	<input type="checkbox"/> UL <input type="checkbox"/> CE <input type="checkbox"/> RoHS <input type="checkbox"/> TUV <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>

The light is for type "Z" attachments. The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shell be destroyed