


Stainless steel wire rope - 7 x 19 + 0

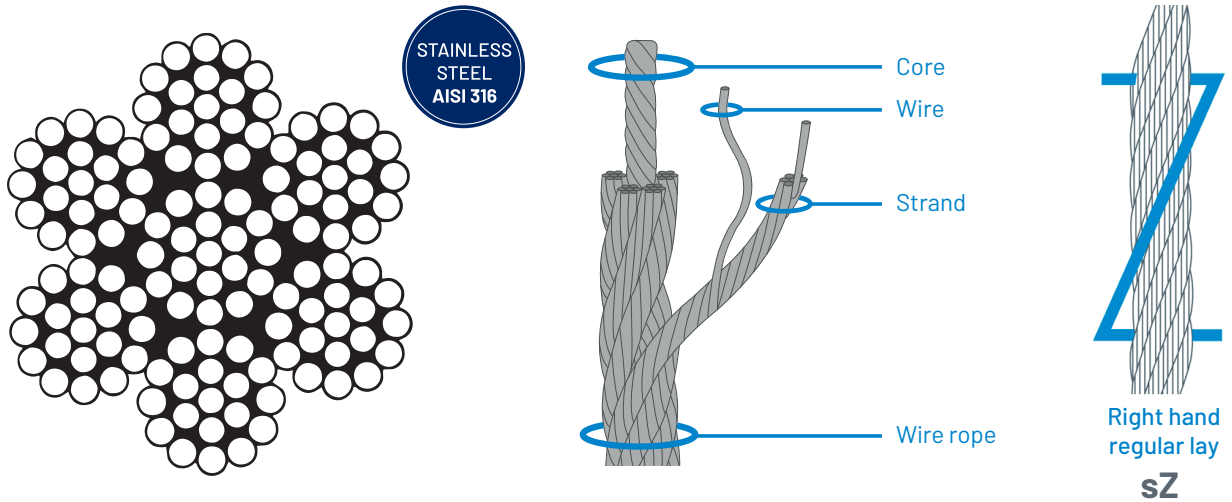

Stainless steel wire rope 7 x 19 + 0 (6 x 19 WSC) is a mechanical element manufactured to maintain a balance between hardness, strength, abrasion, crushing, fatigue and corrosion. The technology used to manufacture steel wire rope is in constant development . Its main characteristics are the wires that make it up, the way they are arranged, how the strands are formed and how they are wound around the core. Thanks to their resistance, strength, durability, thickness and flexibility, steel wire ropes are used in countless applications and locations. UNIQ steel wire rope combines reliability, safety and high performance.


CORE: Metallic
LAY: Regular lay
FINISH: Stainless
USES: Static cable, Agriculture, Livestock, Winch, Cable sling

Certification UNE-EN 12385-4.

Presentation: Reel

Measure Ø Nominal	Part Number	Length m	Minimum Breaking Load 1570 N/mm ²	Weight kg/100 m	Format of presentation	Reel dimensions	
						Ø Inside mm	Ø Outside mm
2	09221032	50	2,27	1,62	Plastic reel	20	94
2	09221043	100	2,27	1,62	Plastic reel	20	94
2	09221054	1000	2,27	1,62	Wooden reel	60	300
3	09221132	50	5,10	3,56	Plastic reel	20	116
3	09221143	100	5,10	3,56	Plastic reel	22	150
3	09221154	1000	5,10	3,56	Wooden reel	60	300
4	09221232	50	9,10	6,37	Plastic reel	20	150
4	09221243	100	9,10	6,37	Plastic reel	25	173
4	09221254	1000	9,10	6,37	Wooden reel	55	345
5	09221332	50	14,20	9,94	Plastic reel	25	173
5	09221343	100	14,20	9,94	Wooden reel	58	245
5	09221354	1000	14,20	9,94	Wooden reel	60	400

Stainless steel wire rope - 7 x 19 + 0

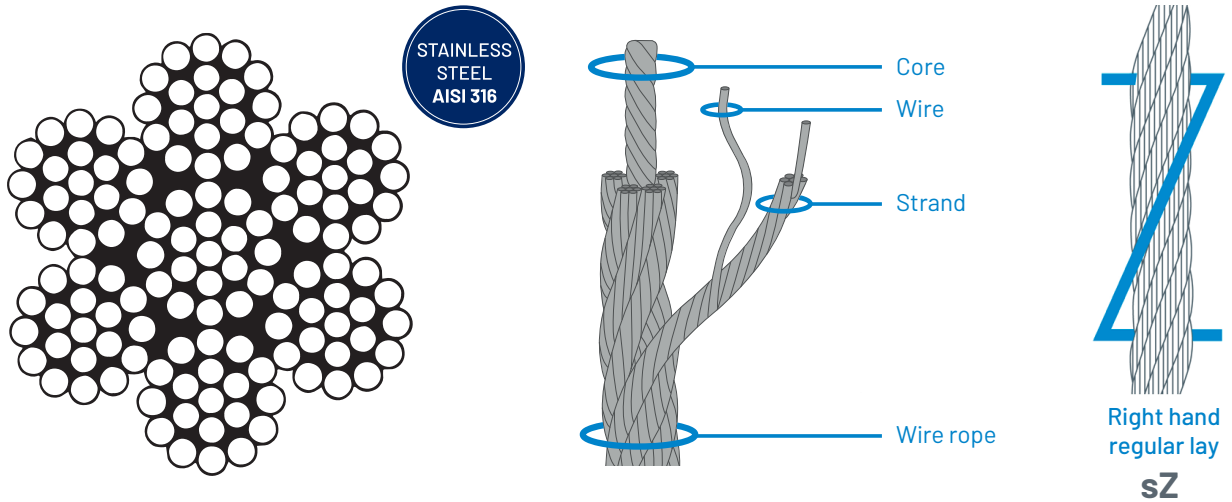

Presentation: Reel

Measure Ø Nominal	Part Number	Length m	Minimum Breaking Load 1570 N/mm ²	Weight kg/100 m	Format of presentation	Reel dimensions	
						Ø Inside mm	Ø Outside mm
6	09221432	50	20,50	14,30	Wooden reel	58	245
6	09221443	100	20,50	14,30	Wooden reel	55	245
8	09221521	25	36,40	25,40	Wooden reel	50	200
8	09221532	50	36,40	25,40	Wooden reel	58	245
8	09221543	100	36,40	25,40	Wooden reel	58	296
10	09221621	25	56,70	39,20	Wooden reel	55	250
10	09221632	50	56,70	39,20	Wooden reel	55	300
10	09221643	100	56,70	39,20	Wooden reel	55	350

Presentation: Shrink-wrapped

Measure Ø Nominal	Part Number	Length m	Minimum Breaking Load 1570 N/mm ²	Weight kg/100 m	Format of presentation
2	09221010	15	2,27	1,62	Shrink-wrapped
2	09221021	25	2,27	1,62	Shrink-wrapped
3	09221110	15	5,10	3,56	Shrink-wrapped
3	09221121	25	5,10	3,56	Shrink-wrapped
4	09221210	15	9,10	6,37	Shrink-wrapped
4	09221221	25	9,10	6,37	Shrink-wrapped
5	09221310	15	14,20	9,94	Shrink-wrapped
5	09221321	25	14,20	9,94	Shrink-wrapped
6	09221410	15	20,50	14,30	Shrink-wrapped
6	09221421	25	20,50	14,30	Shrink-wrapped
8	09221510	15	36,40	25,40	Shrink-wrapped
10	09221540	15	56,70	39,20	Shrink-wrapped